




Pillar Hydrants are generally used, and connected to the water mains around the perimeters of buildings or roadsides.

During emergencies, the Fire Brigade or Fire Engines could draw water from the Pillar Hydrants to fight against any surrounding fire.

**MULTRON** range of products are manufactured in accordance to our ISO 9001 : 2001 Quality Management System.

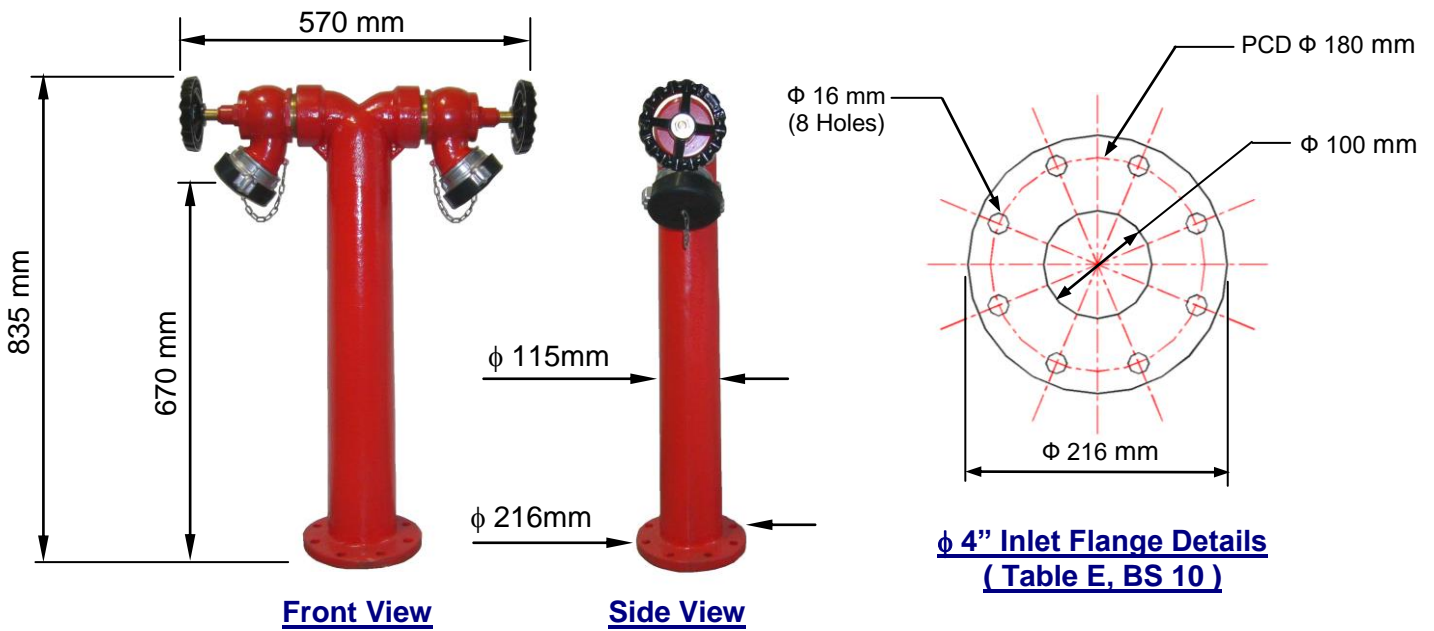

<b>Model</b>	PH-SQS 100VS
<b>Body Material</b>	Cast Iron to BS 1452 (Painted Red)
<b>Hydrant Valve</b>	Copper Alloy Body with Alu. Alloy Connection (Vietnam Style)
<b>Inlet Size</b>	φ4" (100mm) to Table E, BS 10 Flange
<b>Outlet Connection</b>	2 x 2-1/2" Hydrant Valve with Alu. Alloy Connection (Vietnam Style)
<b>Test Pressure</b>	15 Bar
<b>Working Pressure</b>	10 Bar
<b>Weight</b>	30 kg

### Multron Systems Pte Ltd

217 Kallang Bahru, Multron Building, Singapore 339

6395 6868  
6395 6869

info@multron.com  
www.multron.com

