



The range of Hydrant Valves are manufactured under strict Quality Management System to ISO 9001 : 2008

TECHNICAL SPECIFICATION


Inlet	: Flanged or BSP Screw Thread
Outlet	: Female Instantaneous to BS 336
Working Pressure	: 15 Bar
Test Pressure	: 22.5 Bar
Body	: Copper Alloy to BS 1400
Handwheel	: Grey Cast Iron to BS 1452
Outlet Blank Cap	: Plastic



Certified by SETSCO to Standard BS5041 Part 1 : 1987


Oblique Landing Valve

Model No.	Inlet Type / Size	Approx. Weight
DRV-097	Male BSP Thread, 65 mm	4.5kg
DRV-098 Series Flange Type :-		
DRV-098-65TE	BS10 Table E Flange, 65mm	7.0kg
DRV-098-65ANSI	ANSI 150 FF, 65mm	7.0kg
DRV-098-65PN16	BS 4504 PN16 Flange, 65mm	7.0kg

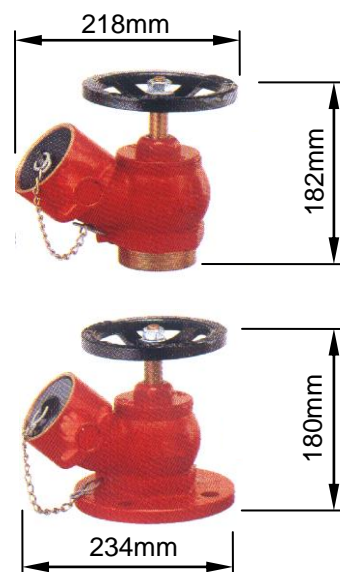

Right Angle Landing Valve

Model No.	Inlet size	Approx. Weight
DRV-105	Male BSP Thread, 65 mm	4.0kg
DRV-106 Series Flange Type :-		
DRV-106-65TE	BS10 Table E Flange, 65mm	7.0kg
DRV-106-65ANSI	ANSI 150 FF, 65mm	7.0kg
DRV-106-65PN16	BS 4504 PN16 Flange, 65mm	7.0kg

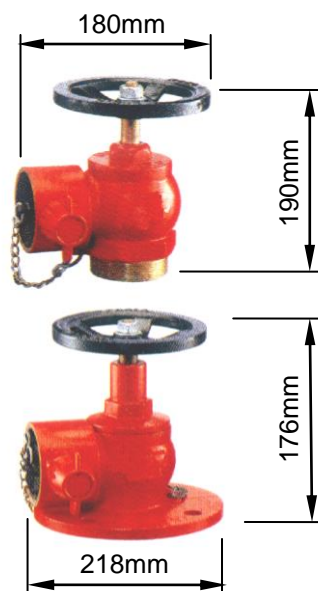

Multron Systems Pte Ltd

217 Kallang Bahru, Multron Building, Singapore 339 347

☎ 6395 6868
☎ 6395 6869

✉ info @ multron.com
🌐 www. multron. com

