



The range of Hydrant Valves are manufactured under strict Quality Management System to ISO 9001 : 2008

TECHNICAL SPECIFICATION

Suitable for Inlet Pressure of up to 20 bar
 Reduced Outlet Static Pressure can be set from 5 to 8 bar
 Outlet Pressure remained constant with Inlet Pressure range from 7 to 20 bar

Test Pressure : 30 bar
 Flow Rate : Up To 900 l/min

Inlet : Flanged or BSP Screw Thread
 Outlet : Female Instantaneous to BS 336

Body : Copper Alloy to BS 1400
 Handwheel : Grey Cast Iron to BS 1452
 Outlet Blank Cap : Plastic




Certified by SETSCO to
 Standard BS5041 Part 1 : 1987

Pressure Regulating Hydrant Valve

Model No.	Inlet Type / Size	Approx. Weight
WRV-121	Male BSP Thread, 65 mm	9.0kg
WRV-120 Series Flange Type :-		
WRV-120 -65TE	BS10 Table E Flange, 65mm	11.5kg
WRV-120 -65ANSI	ANSI 150 FF, 65mm	11.5kg
WRV-120 -65PN16	BS 4504 PN16 Flange, 65mm	11.5kg



Model : WRV-121

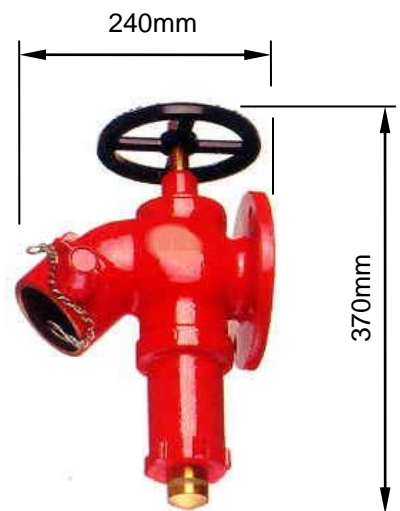

Model : WRV-120 Series

Multron Systems Pte Ltd

217 Kallang Bahru, Multron Building, Singapore 339 347

6395 6868

6395 6869

info @ multron.com

www. multron. com

