



With today's common requirement of providing both Audio and Visual Alarm, the MBA624/AVD-C501 Unit consists of an Alarm Bell with a High Luminance LED Strobe Light mounted as one combine assembly.


TECHNICAL SPECIFICATIONS :-	
Operating Voltage	24VDC ±10%
Current Consumption	≤ 80 mA (During Activation)
Strobe Light Flash Rate	90 flashes per minute
Material of Strobe	ABS Plastic , with Clear Plexiglas Lens
Bell Sound Level	95db at 3m
Material of Bell	Gong : Steel (Red) Base : ABS Plastic
Relative Humidity	≤ 95%, No Condensation
Operating Temp. Range	-10°C to +50°C
Weight	775 gram



**Bell / Strobe Unit**  
**Model : MBA624/C501**



**Front View**

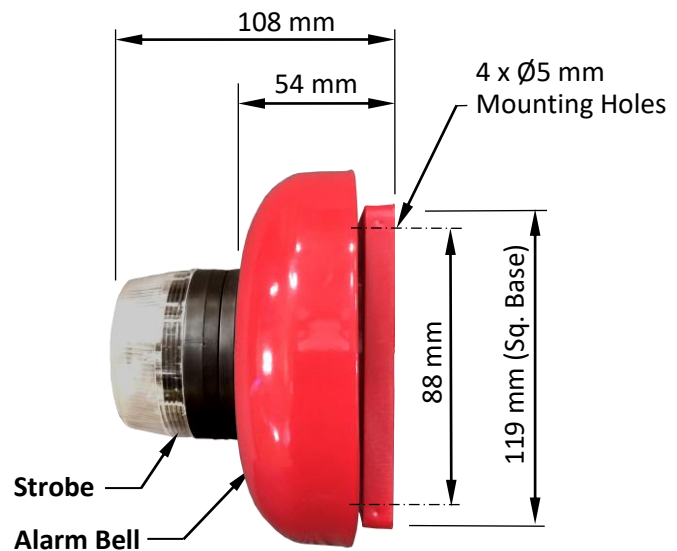

**Side View**

**Typical Dimension**

## Multron Systems Pte Ltd

217 Kallang Bahru, Multron Building, Singapore 339 347

6395 6868  
6395 6869

info@multron.com  
www.multron.com

