



With today's common requirement of providing both Audio and Visual Alarm, the MBA624/AVD-C501 Unit consists of an Alarm Bell with a High Luminance LED Strobe Light mounted as one combine assembly.


| TECHNICAL SPECIFICATIONS :- | |
|-----------------------------|--|
| Operating Voltage | 24VDC ±10% |
| Current Consumption | ≤ 80 mA (During Activation) |
| Strobe Light Flash Rate | 90 flashes per minute |
| Material of Strobe | ABS Plastic , with Clear Plexiglas Lens |
| Bell Sound Level | 95db at 3m |
| Material of Bell | Gong : Steel (Red) Base : ABS Plastic |
| Relative Humidity | ≤ 95%, No Condensation |
| Operating Temp. Range | -10°C to +50°C |
| Weight | 775 gram |



Bell / Strobe Unit
Model : MBA624/C501



Front View

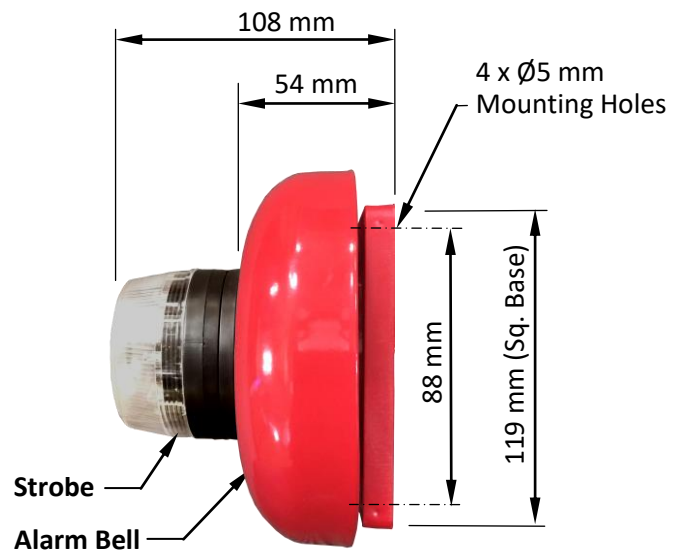

Side View

Typical Dimension

Multron Systems Pte Ltd

217 Kallang Bahru, Multron Building, Singapore 339 347

☎ 6395 6868
🖨 6395 6869

✉ info@multron.com
🌐 www.multron.com

