




ABC Dry Powder is a multi-purpose, and truly versatile extinguishant suitable for Class A, B, C & Electrical fires.

Available in a wide range of sizes and tested to remarkably high performance suitable for commercial, industrial, and even home usage.

The cylinders are of steel construction, coated with epoxy powder for high corrosion resistance, and fitted with brass valves with pressure gauges.

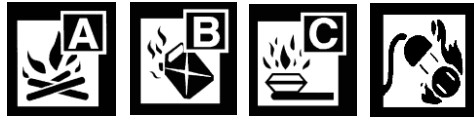

1 kg ABC

2 kg ABC

4,6 & 9 kg ABC

Carbon Dioxide (CO2) Extinguishers are suitable for Class B risks involving flammable liquids and for electrical hazards. Harmless to electrical equipment and is ideal for modern offices, electronic risks, and fires caused by the combustion of liquids such as oils, fats, and solvents.



5 kg CO2

2 kg CO2

Model	EXT-ABC-1K	EXT-ABC-2K	EXT-ABC-4K	EXT-ABC-6K	EXT-ABC-9K	EXT-CO2-2K	EXT-CO2-5K
Filled Capacity	1 kg	2 kg	4 kg	6 kg	9 kg	2 Kg	5 Kg
Est. Gross Wt.	1.7 kg	3.1 kg	6.1 kg	8.5 kg	12.4 kg	7.0 Kg	16.8 Kg
Discharge Time	6 - 10 secs	8 - 12 secs	11 - 15 secs	17 - 21 secs	20 - 24 secs	14 secs	15 secs
Range	4 - 5m	4 - 5m	5 - 6 m	5 - 6m	5 - 6m	4 - 5m	4 - 5m
Fire Rating	5A / 21B	13A / 55B	21A / 113B	27A / 144B	34A / 233B	34B	55B
Cylinder Diameter	Ø88 mm	Ø108 mm	Ø138 mm	Ø158mm	Ø178mm	Ø116mm	Ø152mm
Approx. Height (Including Valve)	300 mm	370 mm	440 mm	520mm	600mm	530mm	670mm
Cylinder Vol.	1.2 litre	2.4 litre	4.7 litre	7.1 litre	10.6 litre	3 litre	7.5 litre
Extinguishant	ABC Dry Powder					Carbon Dioxide	
Working Pressure	14 bar					174 Bar @ 20°C	
Test Pressure	30 bar					250 Bar	
Operating Temp.	-20°C to 60°C					-20°C to 60°C	
Propellant	Dry Nitrogen (N2)					NA	
Finishing	Red - Epoxy Powder Coated						
Standard	Manufactured to EN3 :1996 : Part 1 - Part 6 Standards						

Multron Systems Pte Ltd

217 Kallang Bahru, Multron Building, Singapore 339 347

+65 6395 6868

info @ multron.com

+65 6395 6869

www.multron.com

