




ABC Dry Powder Trolley Fire extinguishers are suitable for mixed fire risk environments. This range offers a combination of fire performance and ease of service.

The trolley unit can be operated by one person and suitable for areas with high risk fire such as industrial facilities.

The cylinders are deep drawn from cold rolled steel with hot forged brass operating valve fitted with pressure indicator. Coated with epoxy powder, the cylinder offers high corrosion resistance.

Designed to EN 1866 requirement, and manufactured to our ISO 9001 Quality Management System.

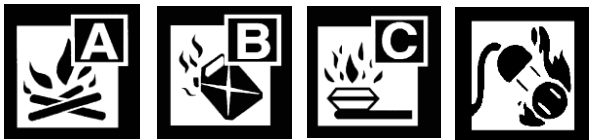

Typical Spray Nozzle
Material : ABS Plastic



Plan View

Model	EXT-ABC-25K	EXT-ABC-50K
Filled Capacity	25 kg	50 kg
Approx. Gross Wt.	50 kg	83 kg
Dimension A	380 mm	420 mm
Dimension B	460 mm	520 mm
Dimension H1	885 mm	1100 mm
Dimension H2	1020 mm	1200 mm
Diameter D	Ø252 mm	Ø298 mm
Discharge Range	8 – 10 metres	
Operating Temp.	-20°C to 55 °C	
Working Pressure	15 bar	
Test Pressure	25 bar	
Wheel Size	Ø240 mm x 32 mm	
Hose Ø x Length	Ø25 mm x 5 metre	



Front View



Side View

Physical Dimension

Multron Systems Pte Ltd

217 Kallang Bahru, Multron Building, Singapore 339 347

☎ 6395 6868

📠 6395 6869

✉ info @ multron.com

🌐 www. multron. com





CO2 Extinguisher on Trolley is made of seamless cylinder to withstand the high storage pressure. It is effective on both Class B and C fires, and electrically non-conductive.

They are commonly used as protection against industrial fires involving dangerous chemical and gas.

Carbon Dioxide disperses without leaving any contamination or corrosive residue and will not damage equipment and materials.

Model	EXT-CO2-25K	EXT-CO2-45K
Filled Weight	25kg	45kg
Approx. Discharge Range	4m	4m
Filled pressure (bar)	55 bar	55 bar
Test pressure	250 bar	250 bar
Discharge Time	Approx. 35s	Approx. 60s
Cylinder Material	Steel BS 5045 Part 1	
Class of Fire	B and C	

Multron Systems Pte Ltd

217 Kallang Bahru, Multron Building, Singapore 339 347

☎ 6395 6868

📠 6395 6869

✉ info@multron.com


🌐 www.multron.com





Foam Trolley Fire Extinguishers are especially suitable for flammable liquids. This range offers a combination of fire performance with ease of service as the trolley unit can be maneuvered and operated by one person, and suitable for areas with high risk fire such as industrial facilities.

The cylinders are deep drawn from cold rolled steel with hot forged brass operating valve fitted with pressure indicator. Coated with epoxy powder, the cylinder offers high corrosion resistance.

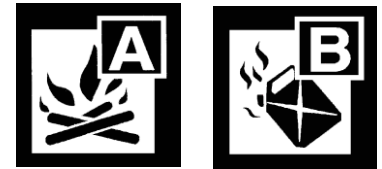

**Foam Trolley
Fire Extinguisher**

Model	EXT-FOM-25K	EXT-FOM-40K	EXT-FOM-65K	EXT-FOM-90K
Filled Weight	25 kg	40 kg	65 kg	90 kg
Volume of Cylinder	35.6 Litre	60 Litre	90 Litre	125 Litre
Discharge Time	≥ 65 sec	≥ 120 sec	≥ 150 sec	≥ 180 sec
Distance of Throw	≥ 9m			
Fire Rating	6A 12B	13A 18B	21A 24B	27A 35B
Operating Temperature	5°C to 55°C			
Extinguishing Agent	3% AFFF Foam Solution			
Packing Size (cm)	47 x 51 x 99	55 x 50 x 100	57 x 57 x 118	60 x 60 x 120

Multron Systems Pte Ltd

217 Kallang Bahru, Multron Building, Singapore 339 347

6395 6868
6395 6869

info @ multron.com
www. multron. com

