




Pillar Hydrants are generally used, and connected to the water mains around the perimeters of buildings or roadsides.

During emergencies, the Fire Brigade or Fire Engines could draw water from the Pillar Hydrants to fight against any surrounding fire.

MULTRON range of products are manufactured in accordance to our ISO 9001 : 2015 Quality Management System.

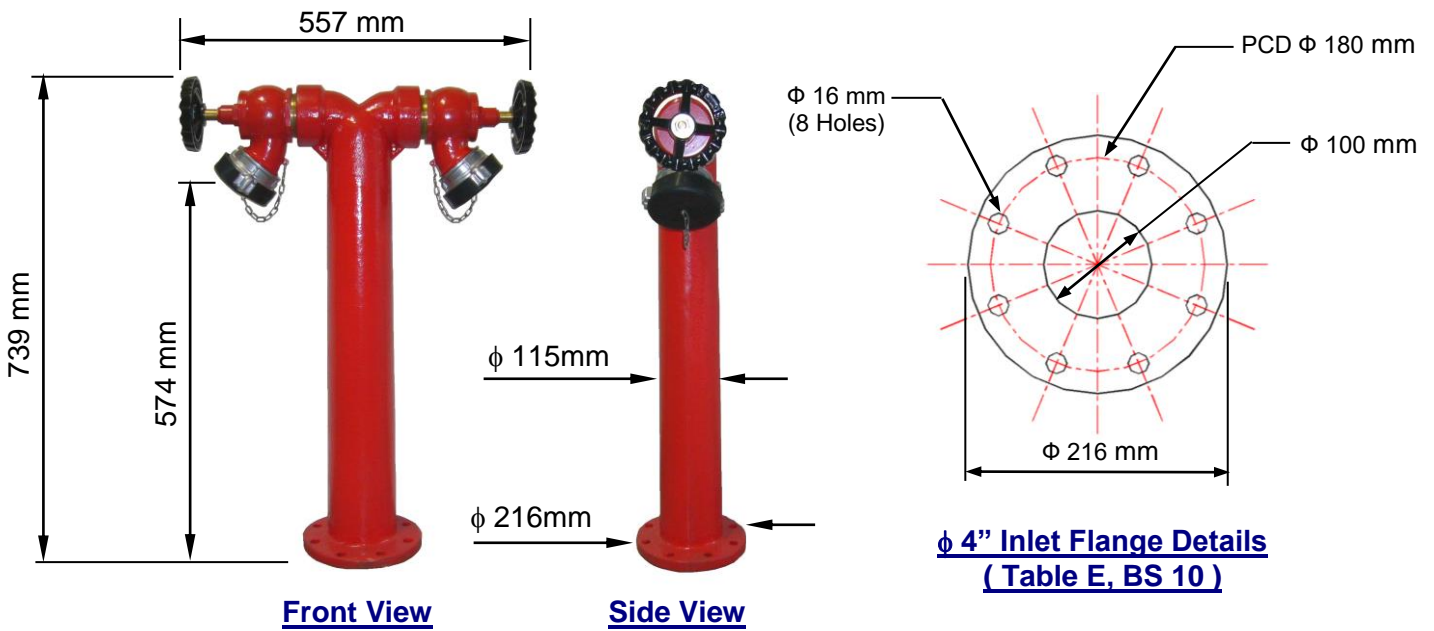

Model	PH-SQS 100VS
Body Material	Cast Iron to BS 1452 (Painted Red)
Hydrant Valve	Copper Alloy Body with Alu. Alloy Connection (Vietnam Style)
Inlet Size	φ4" (100mm) to Table E, BS 10 Flange
Outlet Connection	2 x 2-1/2" Hydrant Valve with Alu. Alloy Connection (Vietnam Style)
Test Pressure	15 Bar
Working Pressure	10 Bar
Weight	Approx. 28 kg

Multron Systems Pte Ltd

217 Kallang Bahru, Multron Building, Singapore 339

6395 6868
6395 6869

info@multron.com
www.multron.com

